

Wood burning heater Harvia M3 SL black

WKM3SL

The SL models are designed for people who want to conveniently heat their sauna from another room or outside the building. The opening direction of the door can be changed, making these stoves even easier to use. SL and Boiler stoves provide great bathing in small and medium-sized saunas.



Features

Net weight (kg) : 48.0

H x W x D : 710.0 x 390.0 x 65.0 mm

Stone amount (kg) : 30.0

ID	GTIN	Power	Sauna room size min - max m3
WKM3SL	6417659001151	16.5 kW	6.0-13.0



Spare parts

Product	ID	Pcs
Ashpan ES/SL	Z2ES-125	1
Furnace grate	ZKIP-10	1
Hinge pin	ZKIP-50	1
Air-flow spoiler M1/M3	ZKIP-630	1
Carton M3SL	ZKIP-560	
Front plate M3 chrome	ZKIP-620	
Handle for stove + screws	ZKIP-670	1
Handle for ash box	ZKIP-680	
Stove door with glass	ZROST-048	
	ZKIP-571	
Handle and screws, Chrome	SPZKIP-670	
Adjustable legs for LG150/SL	SPZKIP-918	
Hinge pin	SPZKIP-50	
Door for stove with knob, black	SP010	
Air-flow spoiler M1/M3	SPZKIP-630	
Cap for smoke hole (Ø 50 mm)	SPZKIP-170	
Glass 184x210x4 mm Stoves 2006-, transparent	SPZTS-36	
Stove door with glass (from 2006)	SP048	
Cast-iron grating 135x290mm, sauna heaters	SPZKIP-10	
Ash box, 20 ES/SL,ESGF	SP681	

Technical details

Technical data	Type / attribute	WKM3SL
	Color	Black
	Power output	16.5 kW
	Stone amount (kg)	30
Dimensions	Product width	390
	Product height	710
	Product depth (mm)	65
	Net weight (kg)	48
	Gross weight	50.6
	Package width	730
	Package height	765
	Package depth	415
Connections	Flue connection locations	Top
	Chimney connection diameter	115
Safety and installation dimensions	Safety distance front (non-combustible materials)	300
	Safety distance front (combustible materials)	300
	Safety distance right side (combustible materials)	250
	Safety distance right side non-combustible materials	100
	Safety distance left side (combustible materials)	250
	Safety distance left side non-combustible materials	100
	Safety distance behind (non-combustible materials)	300
	Safety distance behind (combustible materials)	300




Technical details

Technical data	Type / attribute	WKM3SL
	Safety distance (Ceiling)	1200
	Room min. height(depends on connections and therefore from output, star/delta)	1900

Technical images

1.1. Stove Parts


- A. Upper connection opening
- B. Rear connection opening
- C. Soot opening
- D. Stove door
- E. Ash box

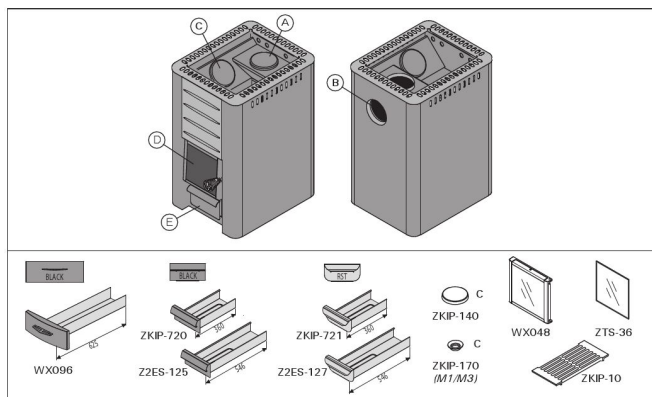

Stove parts. Note! Only use replacement parts recommended by the manufacturer. Unauthorised modification of the stove is prohibited.


3.4. Accessories

- A. Harvia steel chimney WHP1500.**
B. Harvia heater VL221. Installed on the top of the upper connection opening. When a protective sheath or other protection is used that is not large enough to protect the inflammable material and the stove, the protection of the radiation of the pipe between the water heater and smoke flue, you must install a radiation cover around the pipe.
- C. Radiation cover WZ0201130.** Installed around the smoke pipe.
- D. Harvia protective sheath WX017.**
- E. Harvia protective sheath WL400–WL775.**
- F. Harvia protective bending WX018, WL100.** (not for models 20 RS/LS Pro, 36, 36 Duo, Premium VS, Linear 22 RS/LS, 22 RS/LS S).
- G. Harvia protective bending WL110** (not for models ES Pro, ES Duo, ES Duo 22 ES S).
- H. Angle smoke pipe.** Different models
- I. Lead-through flange for smoke pipe**
WZ020115. Covers the edges of the flue opening and the sealing in the wall. Made of stainless steel. Consists of two parts to make it useable with differently inclined smoke pipes.
- J. Rubber connection WZ011115.** Connected to the flue opening, does not require other seals. The inner side already has a seal.

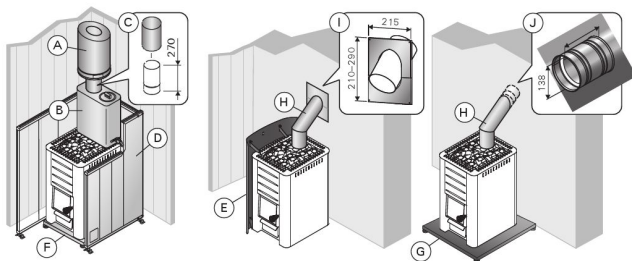


Accessories (all dimensions in millimeters)

	A min.	B min.	C min.	D min.
M1, M2, M3 SL, Classic 140	1200	250	300	300
20 Pro, 20 SL Duo, 20 ES Pro, 20 SL Boiler, Premium V/S, Classic 220 Duo, 20 RS LS Pro	1300	300	300	300
26 Pro, Classic 280	1280	375	375	375
36, 36 Duo	1250	500	500	500
Linear 16, 16	1300	300	350	400
Linear 22, 22 S, Linear 22 RS LS ES, 22 RS LS ES	1265	400	380	500
Linear 28	1380	400	400	500

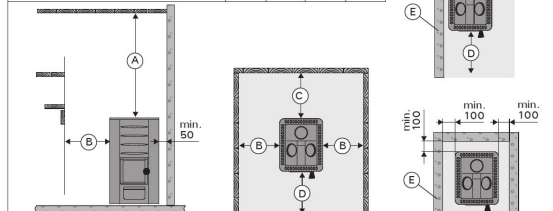

Safety distances (all dimensions in millimeters).

WX017	B min
M1, M2, M3/SL, 20 Pro, 20 SL Duo, 20 ES Pro/S, 20 Boiler, 20 SL Boiler, Premium, Classic 140 SL, Classic 220 Duo	300
26 Pro, Classic 280	375
Linear 16, 16	300
Linear 22/28, Linear 22 ES, 22 ES S, 22 S	400

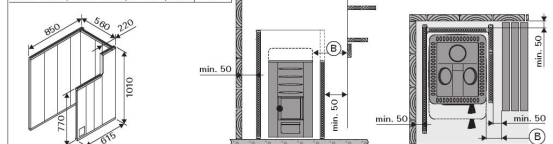

		B min	C min	D min	F	
WL400/WL450	M1, M2, M3-SL 20 Pro SL Duo	50	50	300	30	
WL500/WL550	20 Boiler 30 SL Boiler	62	62	422	30	
WL600/WL650	20 ES Pro-S					
WL700/WL750	26 Pro	73	73	526	30	
WL800/WL850	30, 38 Duo	80	80	700	30	
WL900/WL950	20 ES Pro-S 22 RS SL Duo	62	62	422	30	
WL425/WL475	Linear 16, 16	30	30	400	32	
WL525/WL575	Linear 22, 22					
WL525/WL575	Linear 22, 22 RS					
WL525/WL585	22 RS SL S	70	70	500	40	
WL525/WL585	22 RS SL S					
WL525/WL585	22 ES SL Duo					
WL525/WL585	22 ES SL Duo					
WL326/WL336						

Safety distances with protective sheaths (all dimensions in millimeters)